5/2, 5/3 WAY PNEUMATIC VALVE
22mm width

Features

* Suitable for flammable working environments.
* The valve is actuated by air for accurate response.
* The mounting position is identical to the counter product from SMC.

How to order

SB520 - 02 N S

SB pneumatic valves series	
52	5/2 way
53	5/3 way

Port size	
02	1/4"

Thread	
Blank	PS
N	NPT

Pneumatic control	
S	Single pneumatic
D	Double pneumatic

5/3 way valve is only available for double pneumatic control

Flow chart







Specifications

Model	SB520-02S	SB520-02D	SB530-02D
Port size	1 / 4"		
Sectional area	18mm²		14mm²
Fluid	Compressed air		
Acting	External pilot (1.5 ~ 7 kgf/cm²)		
Operating pressure range	0 ~ 8 kgf/cm²		0 ~ 7 kgf/cm²
Max. operating pressure	9.99 kgf/cm²		
Ambient temperature	-10℃ ~ 80℃		
Net weight	135g	145g	220g

Dimensions

SB520-02S

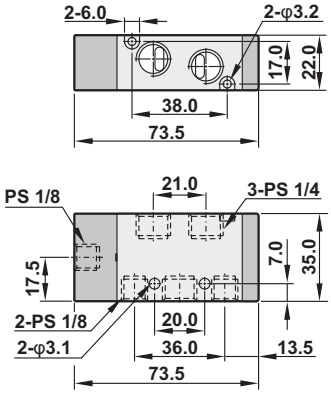

SB520-02D

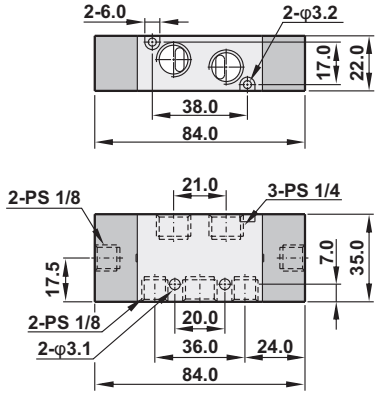
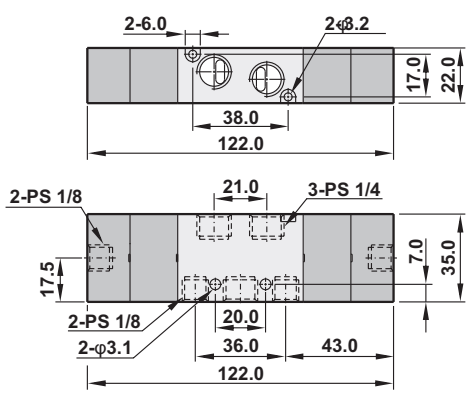
SB530-02D